




THE FRED D. PFENING COMPANY  
DEDICATED TO THE BAKING  
INDUSTRY SINCE 1919  
**WAT-A-MAT**  
**MARK I WATER METER**

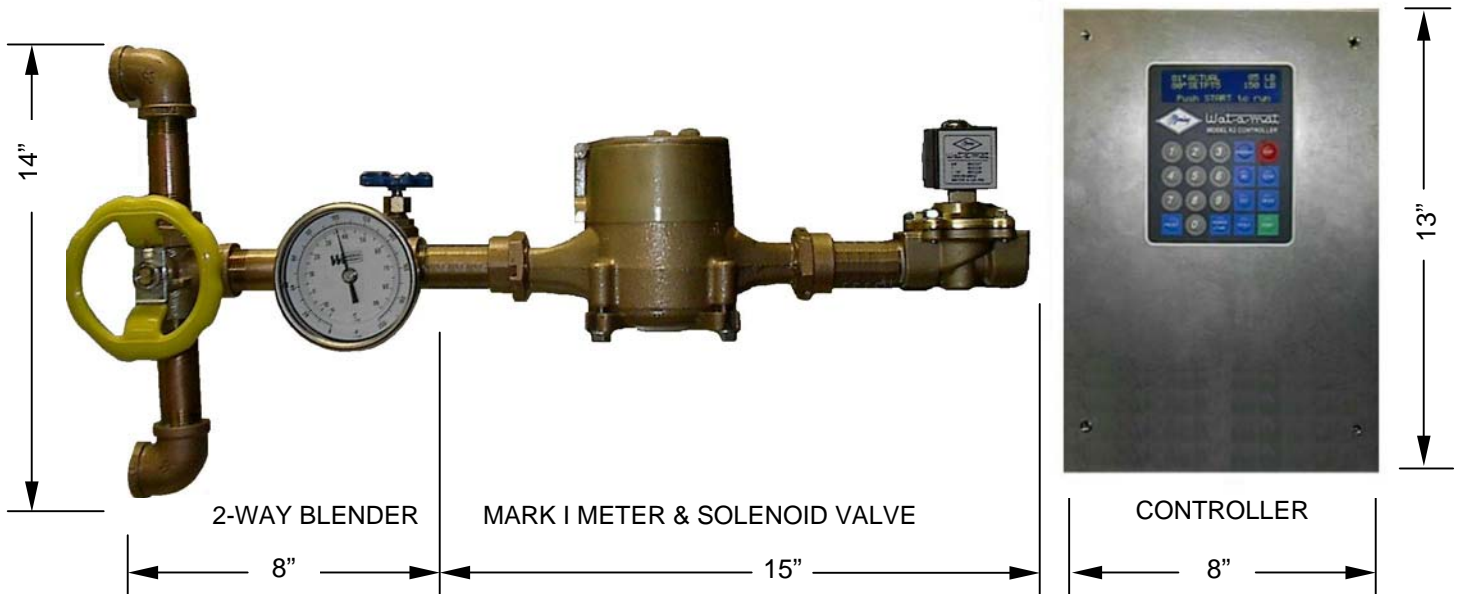

### **Specifications:**

- Connections:** 3/4" pipe (threaded)  
**Power:** 120 or 220 VAC, 50/60 Hz.  
**Flow Rate:** 100 lb/min @ 45 psi inlet  
**Accuracy:** 0.2% for 100 lb batch  
**Repeatability:** 0.1% for 100 lb batch  
**Water Temp.:** 32 to 150 deg. F  
**Ship Weight:** 40 lbs w/ 2-way blender

### **Blender Options:**

- 2-way manual: hot & cold water (shown).
- 3-way manual: hot, cold & chilled water.
- Automatic 3-way temperature blender, (see separate brochure).

**The Mark I is a complete water metering system. It includes the meter, controller and solenoid valve and is factory assembled and tested.**

### The Mark I Meter includes:

- Meter has a cast bronze housing with polymer internals, only two moving parts, electronic pulse pick-up.
- Model K2 Controller has a splash-proof stainless steel enclosure, sanitary 20-key membrane touchpad, four-line LCD display with operator prompts, six setpoints, and includes totalizer and batch counter. Factory pre-programmed, simple operation.
- Solenoid valve has a bronze body, fast-acting solenoid valve for metering accuracy.

### **Other Options:**

- Mounting brackets to hold meter 6" from wall.
- Stainless steel backsplash mounting plate.
- Stainless steel sink w/ backsplash & meter mount brackets.
- Discharge hose (10 ft.) and 'J'-tube nozzle.

THE FRED D. PFENING COMPANY  
MANUFACTURERS OF  
MATERIAL HANDLING, PROOFING,  
AND LIQUID METERING SYSTEMS  
Visit us at [www.pfening.com](http://www.pfening.com)

1075 WEST FIFTH AVENUE  
COLUMBUS, OHIO 43212  
PH. (614) 294-5361  
FAX (614) 294-1633  
email: [sales@pfening.com](mailto:sales@pfening.com)

### SPECIFY TO ORDER:

- MARK I WATER METER
- DESIRED OPTIONS