




THE FRED D. PFENING COMPANY
DEDICATED TO THE BAKING
INDUSTRY SINCE 1919
WAT-A-MAT
MARK V LIQUID METER

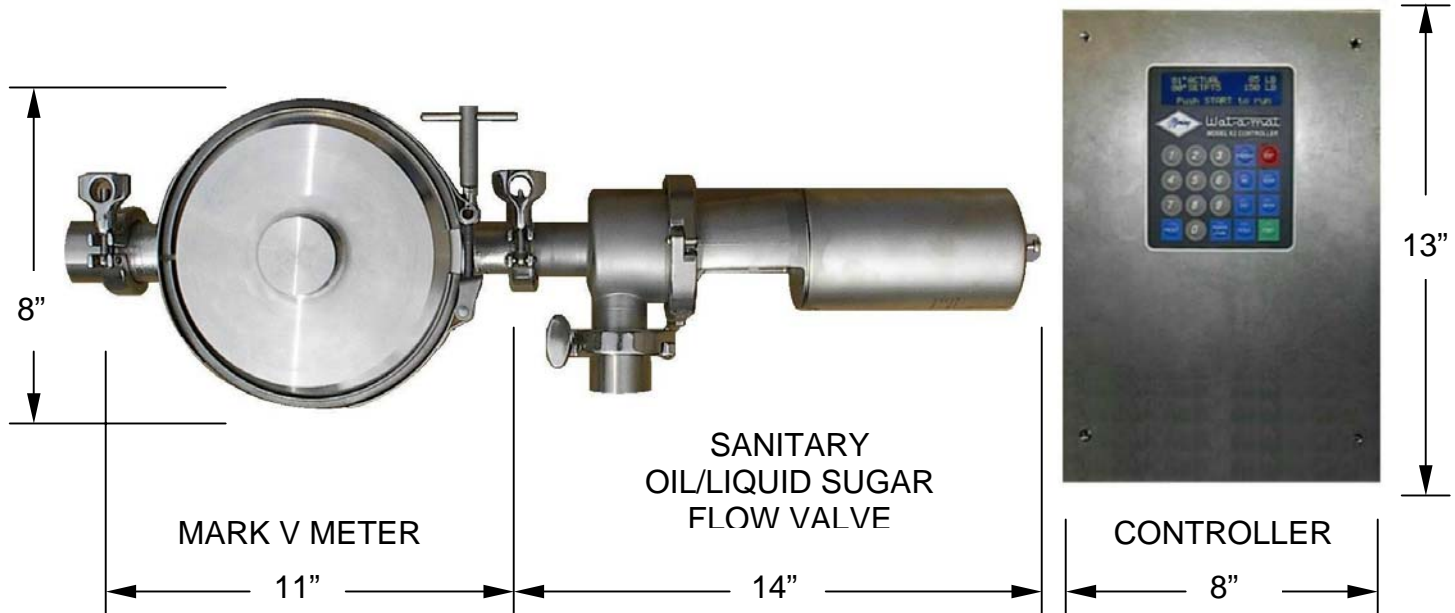

Specifications:

Connections: 1-1/2" sanitary tri-clamp fittings
(adaptors to 1-1/4" MPT optional)

Power: 120 or 220 VAC, 50/60 Hz.

Flow Rate: 400 lb/min @45 inlet psi (water)

Accuracy: 1% for 100 lb batch

Repeatability: 0.5% for 100 lb batch

Temp. Range: Water from 32 to 150 deg. F

Ship Weight: 65 lbs w/ sanitary valve

Blender Options:

- 2-way manual: hot & cold water.
- 3-way manual: hot, cold & chilled water
- Automatic 3-way temperature blender, (see separate brochure).

The Mark V is a complete liquid metering system. It includes the meter, controller, air solenoid valve and regulator. It is factory assembled and tested.

The Mark V Meter includes:

- Meter has a stainless steel housing with polymer internals, only one moving part, electronic pulse pick-up.
- Model K2 Controller has a splash-proof stainless steel enclosure, sanitary 20-key membrane touchpad, four-line LCD display with operator prompts, six setpoints, and includes totalizer and batch counter. Factory pre-programmed, simple operation.
- Water valve has a bronze body and fast-acting solenoid for metering accuracy.
- Oil/Liquid sugar valve is air operated with sanitary stainless steel body, sanitary clamp type connections, air solenoid valve and regulator.

Other Options:

- Mounting brackets to hold meter 6" from wall.
- Stainless steel backsplash mounting plate.
- Stainless steel sink w/ backsplash & meter mount brackets.
- High resolution option.

THE FRED D. PFENING COMPANY
MANUFACTURERS OF
MATERIAL HANDLING, PROOFING,
AND LIQUID METERING SYSTEMS
Visit us at www.pfening.com

1075 WEST FIFTH AVENUE
COLUMBUS, OHIO 43212
PH. (614) 294-5361
FAX (614) 294-1633
email: sales@pfening.com

SPECIFY TO ORDER:

- MARK V LIQUID METER
- DESIRED OPTIONS