




THE FRED D. PFENING COMPANY
 DEDICATED TO THE BAKING
 INDUSTRY SINCE 1919
**30" IN-LINE
 FLOW-THROUGH SIFTER**

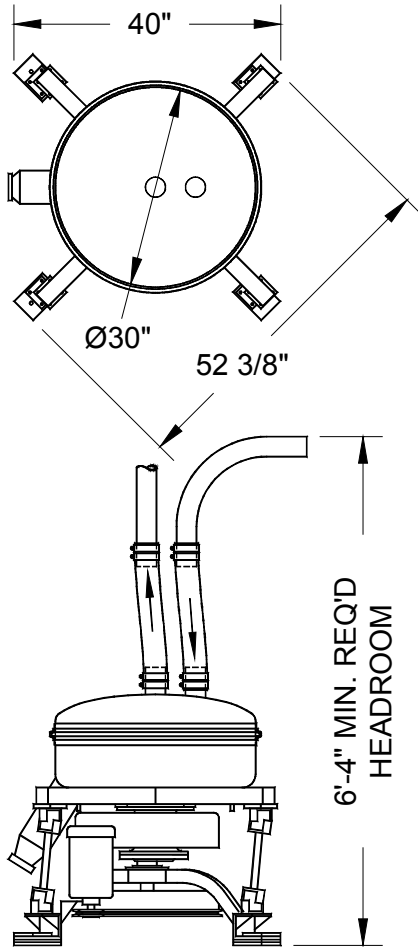

The Pfening Flow-Through Sifter sifts material while it is being pneumatically conveyed. Oversize material is deposited in a tailings container.

The Pressure Sifter Includes:

- Rugged, long-lasting gyratory drive.
- Pressure housing with stainless steel product contact surfaces.
- Compact tailings container with tri-clamp closure.
- Quick-opening cover clamp.
- Easy to replace screens.
- Lightweight aluminum decks.
- Choice of stainless steel or nylon screens.
- Can be used in pressure or vacuum systems.

Options:

- Welded steel support stand and tubing support mast.
- Large capacity tailings container with high level probe.



Specifications:

- Housing:** 304 SS in product contact zone, mild steel elsewhere. (Rating: 15 psi pressure, 15 in. Hg max. vacuum)
- Screen Decks:** Aluminum
- Screen Cloth:** 304 SS, 430 SS, or nylon
- Screen Area:** 2 deck – 6.2 SF
- Drive & Base:** Steel & Cast Iron
- Drive Motor:** 1 HP-XP, (208-230-460/3/60 VAC)
- Tube Size:** 3" or 4"
- Weight:** 1,000 lbs.

Product Material	Screen Mesh	Capacity* (lbs./min.)
Hard Wheat Flour	20	150
	30	100
Soft Wheat Flour	20	50
	30	35
Cake Flour	20	90
	30	55
Sugar	10	200

* Above rates are typical for metal screens. Actual product MUST be tested before final sifter sizing. Send 10 LB. sample of unsifted product to address below.

THE FRED D. PFENING COMPANY
 MANUFACTURERS OF
 MATERIAL HANDLING, PROOFING,
 AND LIQUID METERING SYSTEMS
 Visit us at www.pfening.com

1075 WEST FIFTH AVENUE
 COLUMBUS, OHIO 43212
 PH. (614) 294-5361
 FAX (614) 294-1633
 email: sales@pfening.com

SPECIFY TO ORDER:

- CONTACT A PFENING SALES ENGINEER FOR ASSISTANCE IN SIZING YOUR SIFTER.