




THE FRED D. PFENING COMPANY
 DEDICATED TO THE BAKING
 INDUSTRY SINCE 1919
**WAT-A-MAT
 MARK II WATER METER**

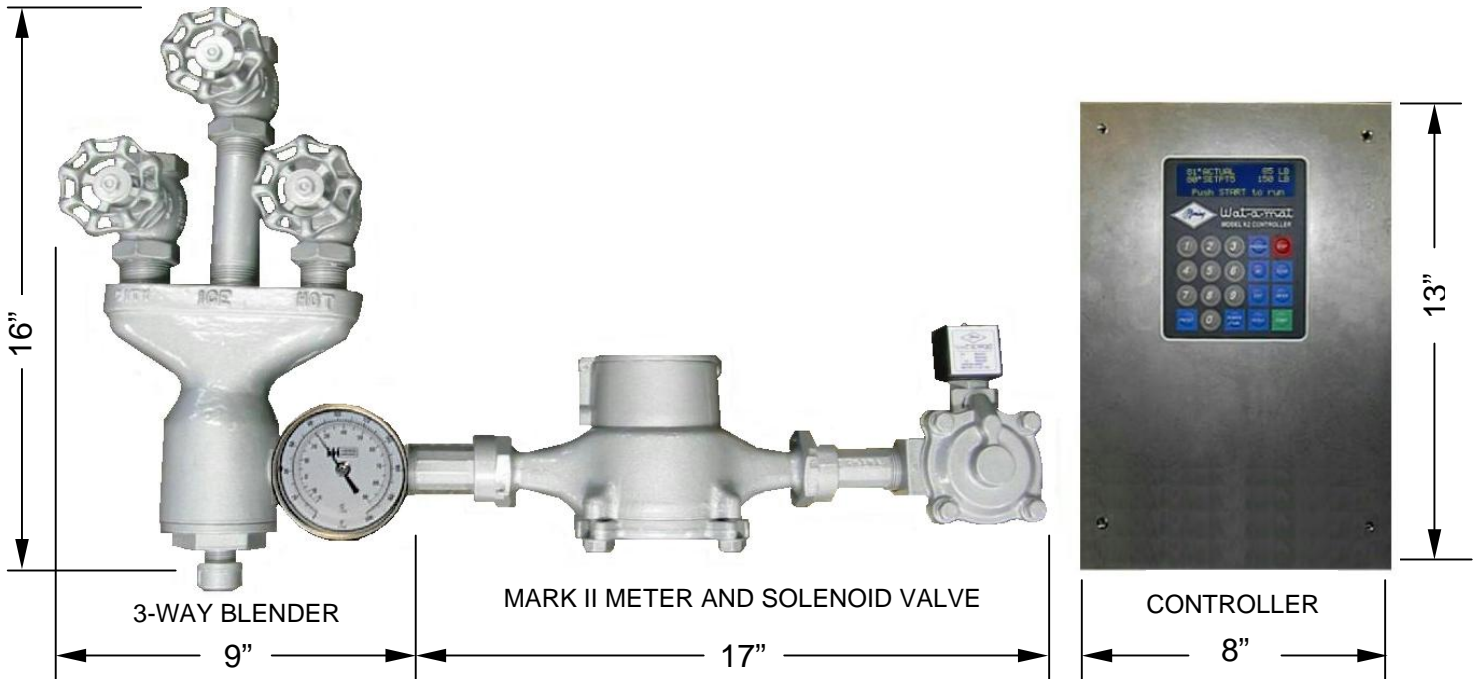

Specifications:

- Connections:** 1" pipe (threaded)
- Power:** 120 or 220 VAC, 50/60 Hz.
- Flow Rate:** 200 lb/min @ 45 psi inlet
- Accuracy:** 0.2% for 200 lb batch
- Repeatability:** 0.1% for 200 lb batch
- Water Temp.:** 32 to 150 deg. F
- Ship Weight:** 60 lbs w/ 3-way blender

Blender Options:

- 2-way manual: hot & cold water.
- 3-way manual: hot, cold & chilled water (shown).
- Automatic 3-way temperature blender, (see separate brochure).

The Mark II is a complete water metering system. It includes the meter, controller and solenoid valve and is factory assembled and tested.

The Mark II Meter includes:

- Meter has a bronze housing with polymer internals, only two moving parts, electronic pulse pick-up.
- Model K2 Controller has a splash-proof stainless steel enclosure, sanitary 20-key membrane touchpad, four-line LCD display with operator prompts, six setpoints, and includes totalizer and batch counter. Factory pre-programmed, simple operation.
- Solenoid valve has a bronze body, fast-acting solenoid valve for metering accuracy.

Other Options:

- Mounting brackets to hold meter 6" from wall.
- Stainless steel backsplash mounting plate.
- Stainless steel sink w/ backslash & meter mount brackets.
- Discharge hose (10 ft.) and 'J'-tube nozzle.

THE FRED D. PFENING COMPANY
 MANUFACTURERS OF
 MATERIAL HANDLING, PROOFING,
 AND LIQUID METERING SYSTEMS
 Visit us at www.pfening.com

1075 WEST FIFTH AVENUE
 COLUMBUS, OHIO 43212
 PH. (614) 294-5361
 FAX (614) 294-1633
 email: sales@pfening.com

SPECIFY TO ORDER:

- MARK II WATER METER
- DESIRED OPTIONS