




THE FRED D. PFENING COMPANY
DEDICATED TO THE BAKING
INDUSTRY SINCE 1919
WAT-A-MAT
MARK IH WATER METER

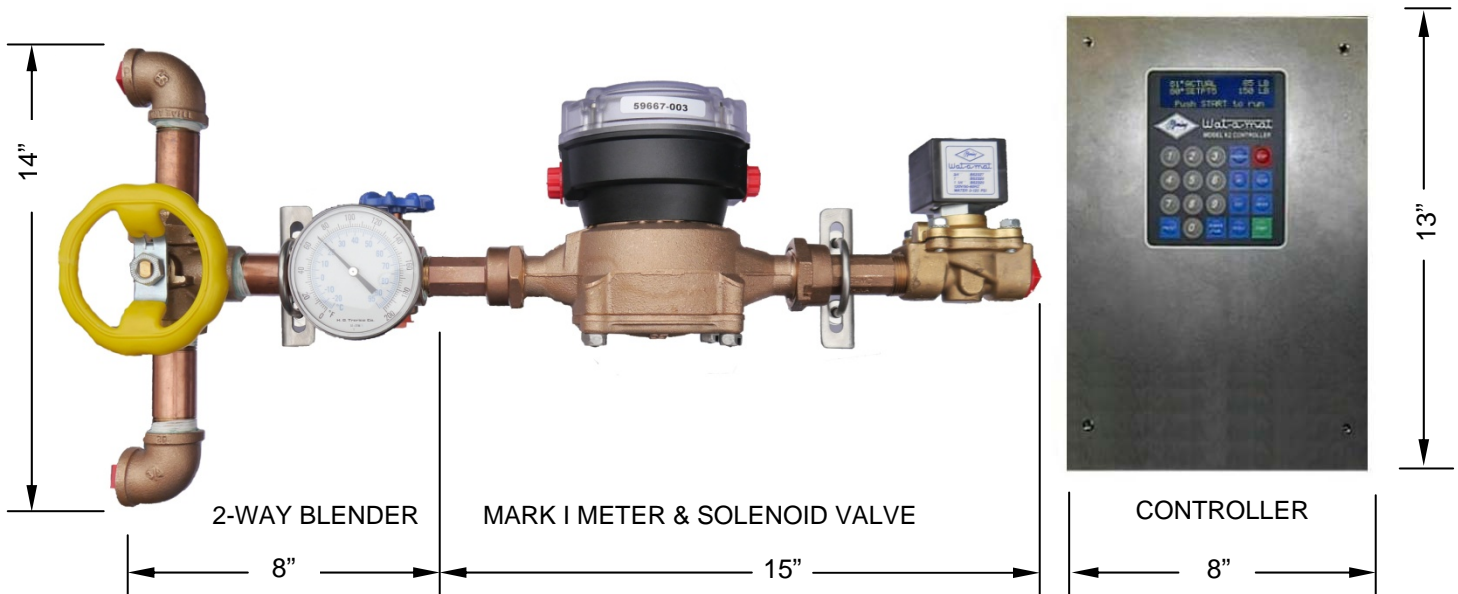

Specifications:

- Connections:** 3/4" pipe (threaded)
- Power:** 120 or 220 VAC, 50/60 Hz.
- Flow Rate:** 100 lb/min @ 45 psi inlet
- Accuracy:** 0.2% for 100 lb batch
- Repeatability:** 0.1% for 100 lb batch
- Water Temp.:** 32 to 190 deg. F
- Ship Weight:** 40 lbs w/ 2-way blender

Blender Options:

- 2-way manual: hot & cold water (shown).
- 3-way manual: hot, cold & chilled water.
- Automatic 3-way temperature blender, (see separate brochure).

The Mark I is a complete water metering system. It includes the meter, controller and solenoid valve and is factory assembled and tested.

The Mark I Meter includes:

- Meter has a cast bronze housing with polymer internals, only two moving parts, electronic pulse pick-up.
- Model K2 Controller has a splash-proof stainless steel enclosure, sanitary 20-key membrane touchpad, four-line LCD display with operator prompts, six setpoints, and includes totalizer and batch counter. Factory pre-programmed, simple operation.
- Solenoid valve has a bronze body, fast-acting solenoid valve for metering accuracy.

Other Options:

- Mounting brackets to hold meter 6" from wall.
- Stainless steel backsplash mounting plate.
- Stainless steel sink w/ backsplash & meter mount brackets.
- Discharge hose (10 ft.) and 'J'-tube nozzle.

THE FRED D. PFENING COMPANY
MANUFACTURERS OF
MATERIAL HANDLING, PROOFING,
AND LIQUID METERING SYSTEMS
Visit us at www.pfening.com

1075 WEST FIFTH AVENUE
COLUMBUS, OHIO 43212
PH. (614) 294-5361
FAX (614) 294-1633
email: sales@pfening.com

SPECIFY TO ORDER:

- MARK I WATER METER
- DESIRED OPTIONS