




THE FRED D. PFENING COMPANY  
DEDICATED TO THE BAKING  
INDUSTRY SINCE 1919  
**WAT-A-MAT**  
**MARK VH LIQUID METER**

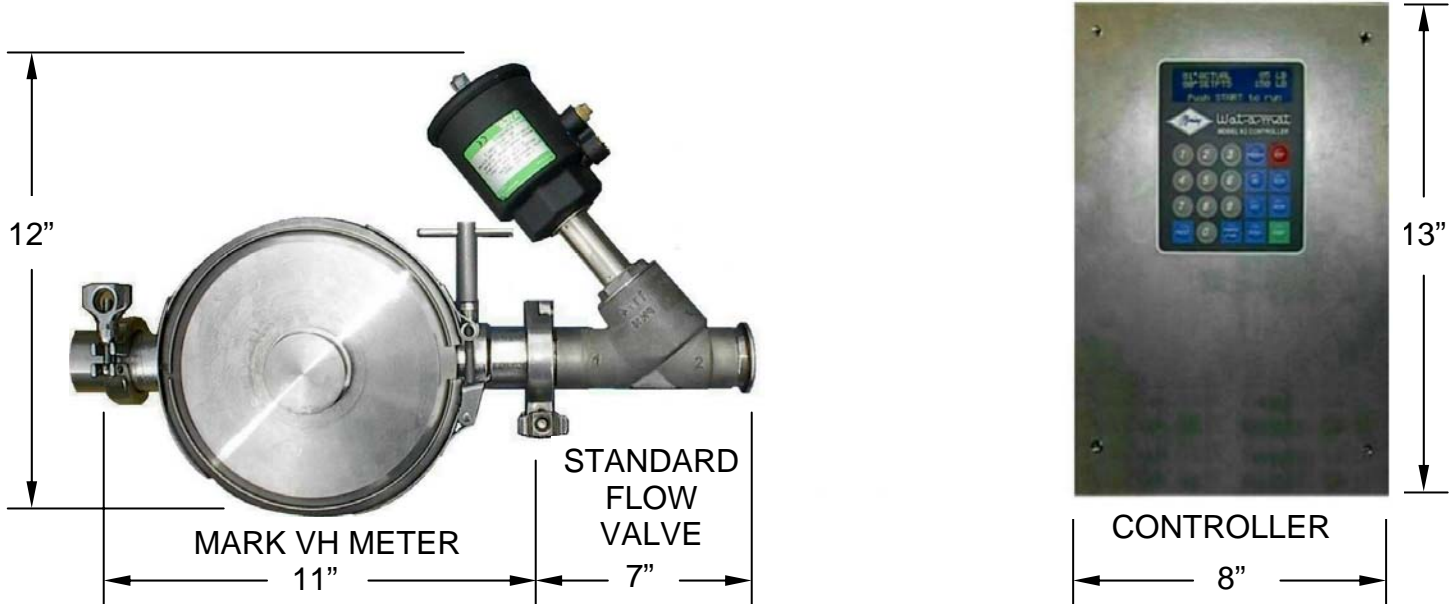

### **Specifications:**

**Connections:** 1-1/2" sanitary tri-clamp fittings  
(Adaptors to 1-1/4" MPT option)

**Power:** 120 or 220 VAC, 50/60 Hz.

**Flow Rate:** 400 lb/min @45 inlet psi (water)

**Accuracy:** 0.2% for 100 lb batch

**Repeatability:** 0.1% for 100 lb batch

**Temp. Range:** 32 °F to 150 °F

**Ship Weight:** 60 lbs

### **Blender Options:**

- 2-way manual: hot & cold water.
- 3-way manual: hot, cold & chilled water
- Automatic 3-way temperature blender,  
(see separate brochure).

**The Mark VH is a complete metering system for water, oils, or syrups. It includes the meter, controller, air solenoid valve and regulator. It is factory assembled and tested.**

### **The Mark VH Meter includes:**

- Meter has a stainless steel housing with polymer internals, only two moving parts, and electronic pulse pick-up.
- Model K2 Controller has a splash-proof stainless steel enclosure, sanitary 20-key membrane touchpad, four-line LCD display with operator prompts, six setpoints, and includes totalizer and batch counter. Factory pre-programmed, simple operation.
- Water valve has a bronze body and fast-acting solenoid for metering accuracy.
- Oil/Liquid sugar valve is air operated with sanitary stainless steel body, clamp type connections, air solenoid valve and regulator.

### **Other Options:**

- Mounting brackets to hold meter 6" from wall.
- Stainless steel backsplash mounting plate.
- Stainless steel sink w/ backsplash & meter mount brackets.
- PLC/Computer control available

THE FRED D. PFENING COMPANY  
MANUFACTURERS OF  
MATERIAL HANDLING, PROOFING,  
AND LIQUID METERING SYSTEMS  
Visit us at [www.pfening.com](http://www.pfening.com)

1075 WEST FIFTH AVENUE  
COLUMBUS, OHIO 43212  
PH. (614) 294-5361  
FAX (614) 294-1633  
email: [sales@pfening.com](mailto:sales@pfening.com)

### **SPECIFY TO ORDER:**

- MARK VH LIQUID METER
- DESIRED OPTIONS